




FEATURE

- SMD S- Seam Type
- Wide frequency range from 10 MHz upto 40 MHz
- RoHS Compliant Standard

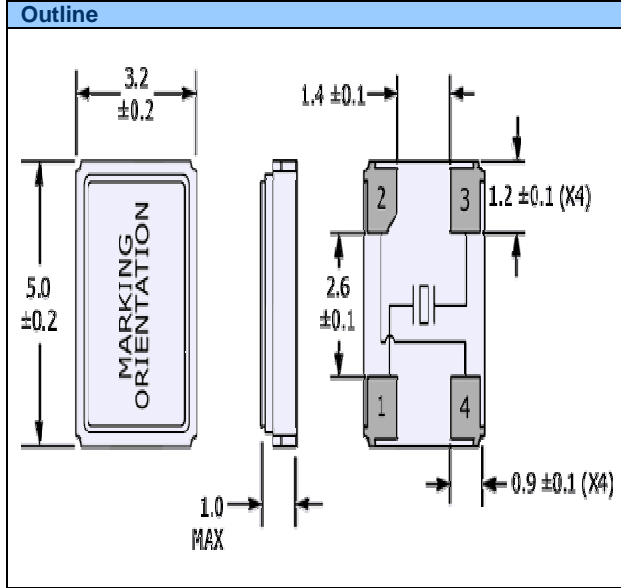

▲ All dimensions are in mm.


Frequency Range	10 MHz to 40 MHz
Mode of Oscillation	Fundamental
Frequency Adjustment Tolerance at 25° C	± 10ppm ~ ± 50ppm - Standard Others - Specify
Operating Temperature Range	-10°C to 60°C
Frequency Stability	Select from table below
ESR	Select from table below.
Drive level	10 µ Watts Typical 300 µ Watts Max.
Resonance Condition	XXS – series, XXP – Parallel with xx pF (Parallel 8 pF, 10 pF, 12 pF, 16 pF)
Storage Temperature	-40°C to +85°C
Ageing	± 5 PPM / Year

Operating Temperature Range	
Code	Range
B	0 °C to +60°C
D	-10 °C to +60°C
C	-20°C to +70°C
I	-40 °C to +85°C

Frequency Adjustment Tolerance at 25°C/ Stability Over OTR	
Code	Stability
D	± 10.0 PPM
E	± 15.0 PPM
F	± 20.0 PPM
M	±50.0 PPM
K	±100.0 PPM

Ordering Information

Example: 5032 D D D 1 12 P 010M000000

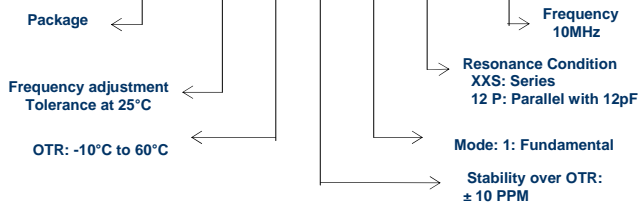

Max Equivalent Series Resistance Table	
Frequency Range MHz	ESR
10.0 to 12.0	80 Ω
12.0 to 40.0	50 Ω

Specifications subject to change without notice
Revision No. 12b of May 2008

ANDHRA ELECTRONICS LIMITED

34 & 35, IDA, Kakinada, AP – 533 005,
INDIA.
URL: www.andhraelec.com

Phone: +91-884-2342203
Fax: +91-884-2341145
E-mail: info@andhraelec.com