




FEATURE

- SMD S- Seam Type
- Wide frequency range from 8 MHz upto 80 MHz
- RoHS Compliant Standard

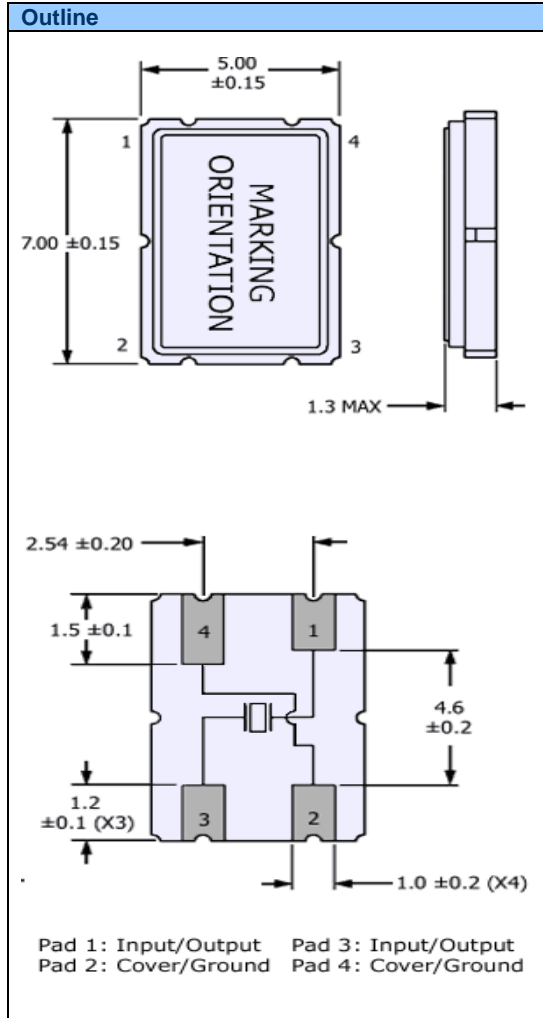

Frequency Range	8 MHz to 80 MHz
Mode of Oscillation	Fundamental & Over tone
Frequency Adjustment Tolerance at 25° C	± 10ppm ~ ± 30ppm - Standard Others - Specify
Operating Temperature Range	-10°C to +60° C
Frequency Stability	Select from table below
ESR	Select from table below
Drive level	10 µ Watts -Typical 300 µ Watts Max.
Resonance Condition	XXS – series, XXP – Parallel with xx pF Fundamental (Series & Parallel) Over tone (Series) (Parallel 8 pF, 10 pF, 12 pF)
Storage Temperature	-40°C to +85°C
Ageing	± 5 PPM / Year

Operating Temperature Range	
Code	Range
B	0 °C to +60°C
D	-10 °C to +60°C
C	-20°C to +70°C
I	-40 °C to +85°C


Frequency Adjustment Tolerance at 25°C/ Stability Over OTR	
Code	Stability
B	± 5.0 PPM
D	± 10.0 PPM
E	± 15.0 PPM
F	± 20.0 PPM
H	±30.0 PPM
M	±50.0 PPM
K	±100.0 PPM

Frequency Range By Mode Of Oscillation	
Fundamental	3 rd Overtone
8.0 to 40.0 MHz	40.0 to 100.0 MHz

▲ All dimensions are in mm.

Ordering Information

Example: 7050 D D D 1 12 P 010M000000

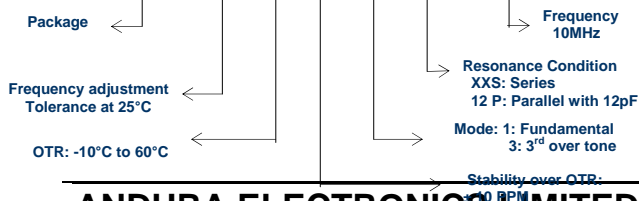

Max Equivalent Series Resistance Table			
Frequency Range MHz	ESR	Frequency Range MHz	ESR
Fundamental		3 rd Overtone	
8.0 to 40.0	50 Ω	40.0 to 80.0	70Ω

Specifications subject to change without notice
Revision No. 12b of May 2008

ANDHRA ELECTRONICS LIMITED

34 & 35, IDA, Kakinada, AP – 533 005,
INDIA.
URL: www.andhraelec.com

Phone: +91-884-2342203
Fax: +91-884-2341145
E-mail: info@andhraelec.com