




FEATURE

- Low Height
- Wide frequency range from 1.5 MHz upto 125 MHz
- High speed CMOS
- RoHS Compliant Standard

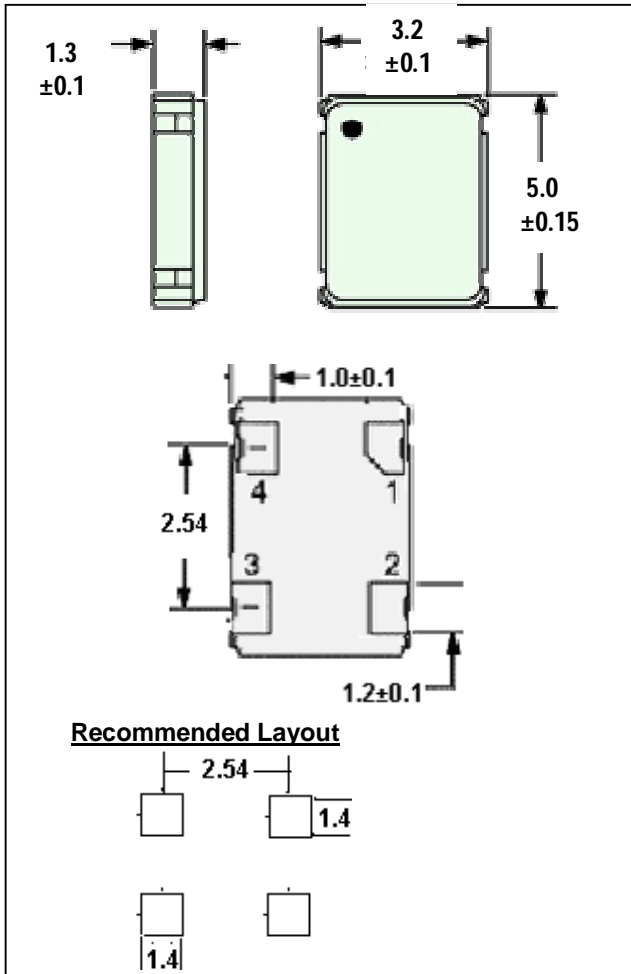


Pin Configuration
 Pin 1: No Connection
 E/D Control (Optional)
 Pin 2: Ground
 Pin 3: Output
 Pin 4: DC Input

Ordering Information

Example

CXO 5032 F G 5 N 010M000000

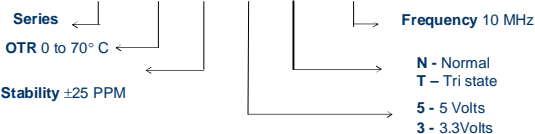

Parameters	
Frequency Range:	1.5 MHz – 125 MHz
Output Drive:	1 to 10 TTL gates (or) 15 pF to 50 pF
Logic Levels:	For 5 Volts - '0' = 0.5V Max. '1' = 4.5 V min. For 3.3 Volts - '0' = 0.4V Max. '1' = 3.0 V min.
Rise / Fall time:	10 nS max. (1.000 MHz – 9.999 MHz) 5 nS max. (10.000 MHz – 125 MHz)
Start up time:	15 mS max. (1.000 MHz – 9.999 MHz) 10 mS max. (10.000 MHz – 125 MHz)
Waveform Symmetry:	60/40% (or) 40/ 60 % (Typical)
Output Waveform:	Square Wave
Frequency Stability:	Select from table below
Temperature Range:	Select from table below
Supply Voltage (V _{cc}):	+5.0V DC (±10%) +3.3V DC (±10%) +2.5V DC (±10%) +1.8V DC (±10%)
Supply Current:	For 5.0 Volts: 60 mA max For 3.3 Volts: 35 mA max For 2.5 Volts: 30 mA max For 1.8 Volts: 20 mA max
Ageing:	± 5 ppm per year max.
Storage Temperature Range:	-40 to +85 °C

Operating Temperature Range	
Code	Range
F	0°C to +70°C
E	-10°C to +70°C
C	-20°C to +70°C
I	-40°C to +85°C

Frequency Stability (Inclusive of Operating Temperature Range)	
Code	Stability
F	± 20 PPM
G	± 25 PPM
H	± 30 PPM
M	± 50 PPM
K	± 100 PPM

Specifications subject to change without notice

ANDHRA ELECTRONICS LIMITED

34 & 35, IDA, Kakinada, AP – 533 005,
 INDIA.
 URL: www.andhraelec.com

Phone: +91-884-2342203
 Fax: +91-884-2341145
 E-mail: info@andhraelec.com