




**FEATURES:**

- Custom Specifications Available
- Fast Prototype and Delivery Available

**MECHANICAL SPECIFICATIONS:**

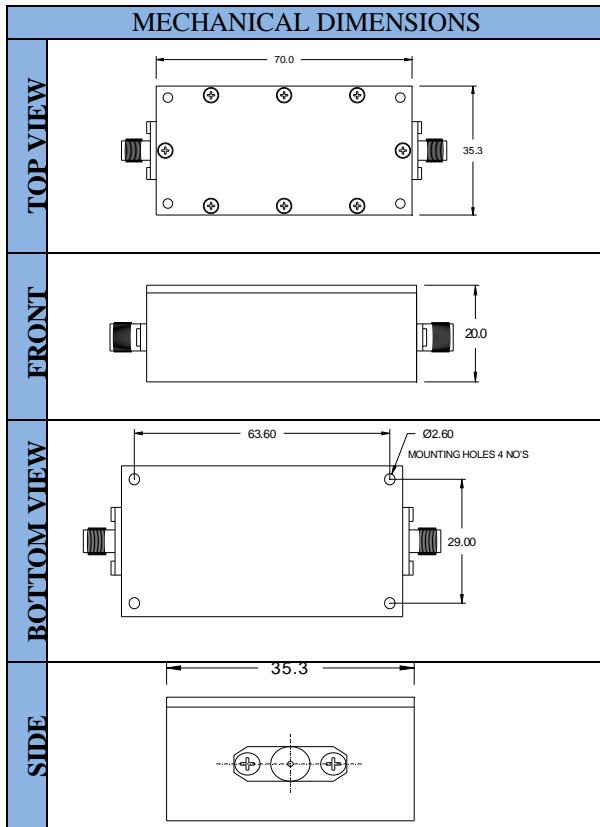


**ELECTRICAL SPECIFICATIONS:**

PARAMETER	SPECIFICATIONS
Centre Frequency	10 MHz
Pass Band	0.75 KHz
Pass band ripple	<1 dB
Stop band attenuation	60dB@Fc±1.5 KHz
Guaranteed attenuation	70 dB
Insertion Loss	<3 dB
Return loss	>10 dB Min
Impedance	50Ω
Operating Temperature	-30°C to +65°C
Storage Temperature	-40°C to +85°C
Package	Connector version
Dimensions	70.0x35.3x20.0 mm

**TABLE:**

Insertion Loss	Return Loss	OTR	No. of Poles
1 → ≤1 dB	A → 10 dB Min	B → 0°C to +60°C	A → 3
2 → ≤2 dB	B → >10 dB	C → -20°C to +70°C	B → 4
3 → ≤3 dB	C → >12 dB	D → -10°C to +60°C	C → 5
4 → ≤4 dB	D → >14 dB	G → -30°C to +80°C	D → 6
5 → ≤5 dB	E → >15 dB	I → -40°C to +85°C	E → 7
6 → ≤6 dB		K → -55°C to +105°C	F → 8
7 → ≤7 dB		L → -55°C to +125°C	G → 9
8 → ≤8 dB			H → 10
9 → >8 dB		N - Not Assign	I → 11
			J → 12
			K → 13

**ORDERING INFORMATION**

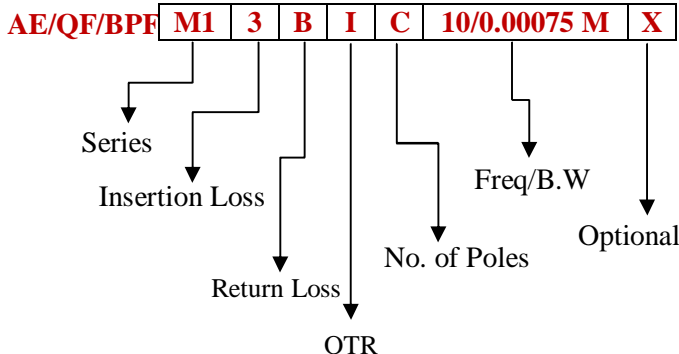

Specifications Subject to change without notice