




# ANDHRA ELECTRONICS PRIVATE LIMITED

## Monolithic Crystal Filter

### Electrical Specifications:

Center Frequency (Fc):	10.7 MHz
Channel Spacing:	12.5 KHz ~ 50 KHz
Number of Poles:	2, 4, 6, 8
3 dB Band width:	$\pm 15$ KHz (max.)
Ripple:	2 dB (max.)
Insertion Loss:	4 dB (max.)
Guaranteed Attenuation: $\pm 300 \sim \pm 1000$ KHz	30 dB to 90 dB
Terminal Impedance:	As per Customer requirement
Operating Temperature Range:	-20°C to +70°C, -30°C to +70°C
Dimensions:	11.5 X 11.2 X 4.5 mm <sup>3</sup>

### Mechanical Specification (in mm):

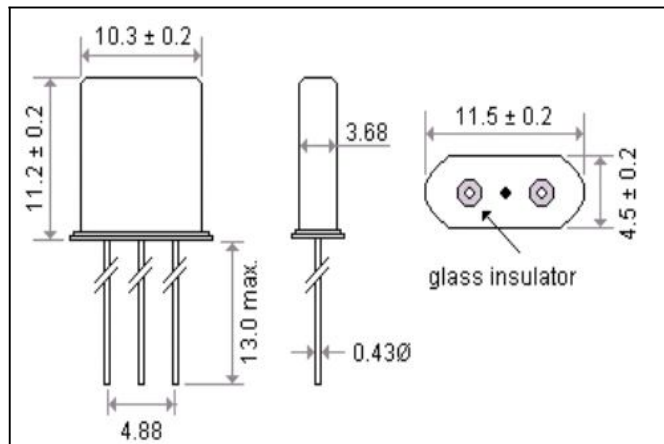

REVISION: 00  
Date of issue: 19.5.2026

Andhra Electronics Pvt. Ltd.

Plot No.: 34 & 35, IDA,  
Kakinada-533 005  
Andhra Pradesh, India  
URL: [www.andhraelec.com](http://www.andhraelec.com)

Phone: +91 884 234 2203  
Fax: +91 884 234 1145  
e-mail: [info@andhraelec.com](mailto:info@andhraelec.com)